


塑料外壳金属化聚酯膜电容器 (P=5.0) Box-type metallized polyester film capacitor

■ 外形图 Outline Drawing

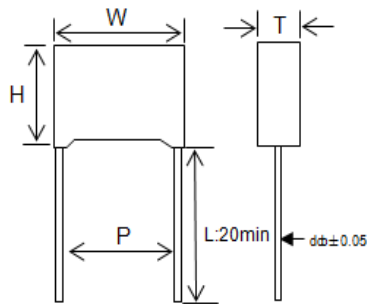

■ 特点

- 金属化聚酯膜
- 塑料外壳 (UL94 V-0) , 阻燃环氧填充
- 抗脉冲能力强

■ 主要用途

- 旁路, 隔直, 耦合, 退耦
- 脉冲, 定时, 电路振荡器
- LCD 监控器整流, 汽车直流马达抑制干扰

■ Features

- Metallized polyester film
- Plastic case (UL94 V-0) , Epoxy resin sealing
- High dv/dt ability

■ Typical Applications:

- By-passing, blocking, coupling, decoupling,
- Pulse logic, timing, oscillator circuits.
- Inverter for LCD monitors, automotive DC motor suppression

■ 技术要求 Specifications

引用标准 Reference Standard	GB/T 7332 (IEC 60384-2)		
气候类别 Climatic Category	55/125/56		
额定温度 Rated temperature	85°C		
工作温度范围 Operating temperature	-55°C~125°C (+85°C to +125°C: decreasing factor 1.25% per °C for VR(dc))		
额定电压 Rated Voltage	50/63V, 100V, 250V, 400V, 500V, 630V, 700V		
电容量范围 Capacitance Range	0.0010μF ~ 2.2μF		
电容量偏差 Capacitance Tolerance	±5%(J), ±10%(K), ±20%(M)		
耐电压 Voltage Proof	1.4UR (5s)		
损耗角正切 Dissipation Factor	≤1.0% (20°C,1kHz)		
绝缘电阻 Insulation Resistance	UR≤100V ≥15 000MΩ, CR≤0.33μF ≥5 000s, 0.33μF<CR≤1.0μF ≥1 000s, CR>1.0μF (20°C,10V,1min) UR>100V ≥30 000MΩ, CR≤0.33μF ≥10 000s, CR>0.33μF (20°C,100V,1min)		
最大脉冲爬升速率 Maximum Pulse Rise Time (dv/dt) 若实际工作电压 U 比额定电压 UR 低, 电容器可工作在更高的 dv/dt 场合。这样 dv/dt 允许值为右表值乘 UR/U。	UR(V)	dv/dt (V/μs)	
		Pattern I	Pattern II
	50/63	250	75
	100	300	85
	250	400	100
	400	600	150
	500	700	200
	630	800	200
700	--	250	

产品代码说明 Part number system

■ 18 位产品代码说明如下:

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□

W 2 4

第 1~3 位: 型号代码

W24=CL23B

第 4~5 位: 直流额定电压

1H= 50V 1J= 63V 2A=100V
 2E=250V 2G=400V 2H=500V
 2J=630V 1V=700V

第 6~8 位: 标称容量

举例 : 104 = 10×10^4 PF = 0.1 μ f

第 9 位: 容量偏差

J=±5%, K=±10%, M=±20%

第 10 位: 引线脚距

D=5.0mm

第 11 位: 引线线径

5= CP 0.5mm 6= CP 0.6mm
 2= CU 0.5mm 3= CU 0.6mm

第 12 位: 引线加工和包装代码

L= 直脚 K= 引线成型
 T= 弹带包装

第 13~18 位: 内部特征码

Digit 1 to 3: Series code

W24=CL23B

Digit 4 to 5: DC rated voltage

1H= 50V 1J= 63V 2A=100V
 2E=250V 2G=400V 2H=500V
 2J=630V 1V=700V

Digit 6 to 8: Rated capacitance

For example: 104 = 10×10^4 PF = 0.1 μ f

Digit 9: Capacitance tolerance

J=±5%, K=±10%, M=±20%

Digit 10: Pitch

D=5.0mm

Digit 11: Lead Wire diameter

5= CP 0.5mm 6= CP 0.6mm
 2= CU 0.5mm 3= CU 0.6mm

Digit 12: Lead form and packaging code

L= straight lead K= Lead kinked
 T= ammo-pack

Digit 13 to 18: Internal use

■ 外形尺寸 Dimensions (mm) Pattern II (reduced size)

50Vdc (30Vac)/63Vdc(40Vac)#						
Cn (μF)	W max	H max	T max	P	d	Part number
0.15	7.2	6.5	2.5	5.0	0.5	W241J154-D5*****
0.18	7.2	6.5	2.5	5.0	0.5	W241J184-D5*****
0.22	7.2	6.5	2.5	5.0	0.5	W241J224-D5*****
0.27	7.2	6.5	2.5	5.0	0.5	W241J274-D5*****
0.33	7.2	7.5	3.5	5.0	0.5	W241J334-D5*****
0.39	7.2	7.5	3.5	5.0	0.5	W241J394-D5*****
0.47	7.2	7.5	3.5	5.0	0.5	W241J474-D5*****
0.56	7.2	9.5	4.5	5.0	0.6	W241J564-D6*****
0.68	7.2	9.5	4.5	5.0	0.6	W241J684-D6*****
0.82	7.2	9.5	4.5	5.0	0.6	W241J824-D6*****
1.0	7.2	10.0	5.0	5.0	0.6	W241J105-D6*****
1.5	7.2	11.0	6.0	5.0	0.6	W241J155-D6*****
2.2	7.2	11.0	6.0	5.0	0.6	W241J225-D6*****

100Vdc 63Vac)						
Cn (μF)	W max	H max	T max	P	d	Part number
0.10	7.2	6.5	2.5	5.0	0.5	W242A104-D5*****
0.12	7.2	6.5	2.5	5.0	0.5	W242A124-D5*****
0.15	7.2	7.5	3.5	5.0	0.5	W242A154-D5*****
0.18	7.2	7.5	3.5	5.0	0.5	W242A184-D5*****
0.22	7.2	7.5	3.5	5.0	0.5	W242A224-D5*****
0.27	7.2	9.5	4.5	5.0	0.6	W242A274-D6*****
0.33	7.2	9.5	4.5	5.0	0.6	W242A334-D6*****
0.39	7.2	9.5	4.5	5.0	0.6	W242A394-D6*****
0.47	7.2	10.0	5.0	5.0	0.6	W242A474-D6*****
0.56	7.2	10.0	5.0	5.0	0.6	W242A564-D6*****
0.68	7.2	11.0	6.0	5.0	0.6	W242A684-D6*****
0.82	7.2	11.0	6.0	5.0	0.6	W242A824-D6*****
1.0	7.2	11.0	6.0	5.0	0.6	W242A105-D6*****

250Vdc(140Vac)						
Cn (μF)	W max	H max	T max	P	d	Part number
0.022	7.2	6.5	2.5	5.0	0.5	W242E223-D5*****
0.027	7.2	6.5	2.5	5.0	0.5	W242E273-D5*****
0.033	7.2	6.5	2.5	5.0	0.5	W242E333-D5*****
0.039	7.2	7.5	3.5	5.0	0.5	W242E393-D5*****
0.047	7.2	7.5	3.5	5.0	0.5	W242E473-D5*****
0.056	7.2	7.5	3.5	5.0	0.5	W242E563-D5*****
0.068	7.2	7.5	3.5	5.0	0.5	W242E683-D5*****
0.082	7.2	9.5	4.5	5.0	0.6	W242E823-D6*****
0.10	7.2	9.5	4.5	5.0	0.6	W242E104-D6*****
0.12	7.2	9.5	4.5	5.0	0.6	W242E124-D6*****
0.15	7.2	10.0	5.0	5.0	0.6	W242E154-D6*****
0.18	7.2	11.0	6.0	5.0	0.6	W242E184-D6*****
0.22	7.2	11.0	6.0	5.0	0.6	W242E224-D6*****

400Vdc(160Vac)						
Cn (μF)	W max	H max	T max	P	d	Part number
0.0056	7.2	6.5	2.5	5.0	0.5	W242G562-D5*****
0.0068	7.2	6.5	2.5	5.0	0.5	W242G682-D5*****
0.0082	7.2	6.5	2.5	5.0	0.5	W242G822-D5*****
0.010	7.2	6.5	2.5	5.0	0.5	W242G103-D5*****
0.012	7.2	6.5	2.5	5.0	0.5	W242G123-D5*****
0.015	7.2	7.5	3.5	5.0	0.5	W242G153-D5*****
0.018	7.2	7.5	3.5	5.0	0.5	W242G183-D5*****
0.022	7.2	7.5	3.5	5.0	0.5	W242G223-D5*****
0.027	7.2	7.5	3.5	5.0	0.5	W242G273-D5*****
0.033	7.2	9.5	4.5	5.0	0.6	W242G333-D6*****
0.039	7.2	9.5	4.5	5.0	0.6	W242G393-D6*****
0.047	7.2	9.5	4.5	5.0	0.6	W242G473-D6*****
0.051	7.2	10.0	5.0	5.0	0.6	W242G513-D6*****
0.056	7.2	11.0	6.0	5.0	0.6	W242G563-D6*****
0.068	7.2	11.0	6.0	5.0	0.6	W242G683-D6*****
0.082	7.2	11.0	6.0	5.0	0.6	W242G823-D6*****
0.10	7.2	11.0	6.0	5.0	0.6	W242G104-D6*****

备注：1. “-”表示容量偏差。“-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. 第12位表示引线加工和包装代码, L=直脚 straight lead K=引线成型 Lead kinked T=弹带包装 ammo-pack

3. “#”当额定电压是50Vdc时,第4~5位代码是1H。“#”when the rated voltage is 50Vdc, the digit 4~5 is 1H.

■ 外形尺寸 Dimensions (mm) Pattern II (reduced size)

500/630Vdc (220Vac)#						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0018	7.2	6.5	2.5	5.0	0.5	W242J182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W242J222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W242J272-D5*****
0.0033	7.2	6.5	2.5	5.0	0.5	W242J332-D5*****
0.0039	7.2	6.5	2.5	5.0	0.5	W242J392-D5*****
0.0047	7.2	6.5	2.5	5.0	0.5	W242J472-D5*****
0.0056	7.2	7.5	3.5	5.0	0.5	W242J562-D5*****
0.0068	7.2	7.5	3.5	5.0	0.5	W242J682-D5*****
0.0082	7.2	7.5	3.5	5.0	0.5	W242J822-D5*****
0.010	7.2	7.5	3.5	5.0	0.5	W242J103-D5*****
0.012	7.2	9.5	4.5	5.0	0.6	W242J123-D6*****
0.015	7.2	9.5	4.5	5.0	0.6	W242J153-D6*****
0.018	7.2	9.5	4.5	5.0	0.6	W242J183-D6*****
0.022	7.2	10.0	5.0	5.0	0.6	W242J223-D6*****
0.027	7.2	11.0	6.0	5.0	0.6	W242J273-D6*****
0.033	7.2	11.0	6.0	5.0	0.6	W242J333-D6*****

700Vdc (250Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W241V102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W241V122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W241V152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W241V182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W241V222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W241V272-D5*****
0.0033	7.2	7.5	3.5	5.0	0.5	W241V332-D5*****
0.0039	7.2	7.5	3.5	5.0	0.5	W241V392-D5*****
0.0047	7.2	7.5	3.5	5.0	0.5	W241V472-D5*****
0.0056	7.2	7.5	3.5	5.0	0.5	W241V562-D5*****
0.0068	7.2	7.5	3.5	5.0	0.5	W241V682-D5*****
0.0082	7.2	9.5	4.5	5.0	0.6	W241V822-D6*****
0.010	7.2	9.5	4.5	5.0	0.6	W241V103-D6*****
0.012	7.2	9.5	4.5	5.0	0.6	W241V123-D6*****
0.015	7.2	10.0	5.0	5.0	0.6	W241V153-D6*****
0.018	7.2	10.0	5.0	5.0	0.6	W241V183-D6*****
0.022	7.2	11.0	6.0	5.0	0.6	W241V223-D6*****

■ 外形尺寸 Dimensions (mm) Pattern I

50Vdc (30Vac)/63Vdc(40Vac)#						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W241J102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W241J122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W241J152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W241J182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W241J222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W241J272-D5*****
0.0033	7.2	6.5	2.5	5.0	0.5	W241J332-D5*****
0.0039	7.2	6.5	2.5	5.0	0.5	W241J392-D5*****
0.0047	7.2	6.5	2.5	5.0	0.5	W241J472-D5*****
0.0056	7.2	6.5	2.5	5.0	0.5	W241J562-D5*****
0.0068	7.2	6.5	2.5	5.0	0.5	W241J682-D5*****
0.0082	7.2	6.5	2.5	5.0	0.5	W241J822-D5*****
0.010	7.2	6.5	2.5	5.0	0.5	W241J103-D5*****
0.012	7.2	6.5	2.5	5.0	0.5	W241J123-D5*****
0.015	7.2	6.5	2.5	5.0	0.5	W241J153-D5*****
0.018	7.2	6.5	2.5	5.0	0.5	W241J183-D5*****
0.022	7.2	6.5	2.5	5.0	0.5	W241J223-D5*****
0.027	7.2	6.5	2.5	5.0	0.5	W241J273-D5*****
0.033	7.2	6.5	2.5	5.0	0.5	W241J333-D5*****

50Vdc (30Vac)/63Vdc(40Vac)#						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.039	7.2	6.5	2.5	5.0	0.5	W241J393-D5*****
0.047	7.2	6.5	2.5	5.0	0.5	W241J473-D5*****
0.056	7.2	6.5	2.5	5.0	0.5	W241J563-D5*****
0.068	7.2	6.5	2.5	5.0	0.5	W241J683-D5*****
0.082	7.2	6.5	2.5	5.0	0.5	W241J823-D5*****
0.10	7.2	6.5	2.5	5.0	0.5	W241J104-D5*****
0.12	7.2	6.5	2.5	5.0	0.5	W241J124-D5*****
0.15	7.2	7.5	3.5	5.0	0.5	W241J154-D5*****
0.18	7.2	7.5	3.5	5.0	0.5	W241J184-D5*****
0.22	7.2	7.5	3.5	5.0	0.5	W241J224-D5*****
0.27	7.2	9.5	4.5	5.0	0.6	W241J274-D6*****
0.33	7.2	9.5	4.5	5.0	0.6	W241J334-D6*****
0.39	7.2	9.5	4.5	5.0	0.6	W241J394-D6*****
0.47	7.2	10.0	5.0	5.0	0.6	W241J474-D6*****
0.56	7.2	10.0	5.0	5.0	0.6	W241J564-D6*****
0.68	7.2	11.0	6.0	5.0	0.6	W241J684-D6*****
0.82	7.2	11.0	6.0	5.0	0.6	W241J824-D6*****
1.0	7.2	11.0	6.0	5.0	0.6	W241J105-D6*****

备注: 1. "-"表示容量偏差。"-="capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack

3. "#当额定电压是 500Vdc,50Vdc 时, 第 4~5 位代码是 2H 和 1H。"#when the rated voltage is 500Vdc,50Vdc, the digit 4~5 is 2H,1H.

■ 外形尺寸 Dimensions (mm) Pattern I

100Vdc (63Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W242A102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W242A122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W242A152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W242A182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W242A222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W242A272-D5*****
0.0033	7.2	6.5	2.5	5.0	0.5	W242A332-D5*****
0.0039	7.2	6.5	2.5	5.0	0.5	W242A392-D5*****
0.0047	7.2	6.5	2.5	5.0	0.5	W242A472-D5*****
0.0056	7.2	6.5	2.5	5.0	0.5	W242A562-D5*****
0.0068	7.2	6.5	2.5	5.0	0.5	W242A682-D5*****
0.0082	7.2	6.5	2.5	5.0	0.5	W242A822-D5*****
0.010	7.2	6.5	2.5	5.0	0.5	W242A103-D5*****
0.012	7.2	6.5	2.5	5.0	0.5	W242A123-D5*****
0.015	7.2	6.5	2.5	5.0	0.5	W242A153-D5*****
0.018	7.2	6.5	2.5	5.0	0.5	W242A183-D5*****
0.022	7.2	6.5	2.5	5.0	0.5	W242A223-D5*****
0.027	7.2	6.5	2.5	5.0	0.5	W242A273-D5*****
0.033	7.2	6.5	2.5	5.0	0.5	W242A333-D5*****
0.039	7.2	6.5	2.5	5.0	0.5	W242A393-D5*****
0.047	7.2	6.5	2.5	5.0	0.5	W242A473-D5*****
0.056	7.2	6.5	2.5	5.0	0.5	W242A563-D5*****
0.068	7.2	6.5	2.5	5.0	0.5	W242A683-D5*****
0.082	7.2	6.5	2.5	5.0	0.5	W242A823-D5*****
0.10	7.2	7.5	3.5	5.0	0.5	W242A104-D5*****
0.12	7.2	9.5	4.5	5.0	0.6	W242A124-D6*****
0.15	7.2	9.5	4.5	5.0	0.6	W242A154-D6*****
0.18	7.2	9.5	4.5	5.0	0.6	W242A184-D6*****
0.22	7.2	10.0	5.0	5.0	0.6	W242A224-D6*****
0.27	7.2	10.0	5.0	5.0	0.6	W242A274-D6*****
0.33	7.2	11.0	6.0	5.0	0.6	W242A334-D6*****
0.39	7.2	11.0	6.0	5.0	0.6	W242A394-D6*****
0.47	7.2	11.0	6.0	5.0	0.6	W242A474-D6*****
0.56	7.2	11.0	6.0	5.0	0.6	W242A564-D6*****

250Vdc (160Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W242E102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W242E122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W242E152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W242E182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W242E222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W242E272-D5*****
0.0033	7.2	6.5	2.5	5.0	0.5	W242E332-D5*****
0.0039	7.2	6.5	2.5	5.0	0.5	W242E392-D5*****
0.0047	7.2	6.5	2.5	5.0	0.5	W242E472-D5*****
0.0056	7.2	6.5	2.5	5.0	0.5	W242E562-D5*****
0.0068	7.2	6.5	2.5	5.0	0.5	W242E682-D5*****
0.0082	7.2	6.5	2.5	5.0	0.5	W242E822-D5*****
0.010	7.2	6.5	2.5	5.0	0.5	W242E103-D5*****
0.012	7.2	6.5	2.5	5.0	0.5	W242E123-D5*****
0.015	7.2	6.5	2.5	5.0	0.5	W242E153-D5*****
0.018	7.2	6.5	2.5	5.0	0.5	W242E183-D5*****
0.022	7.2	7.5	3.5	5.0	0.5	W242E223-D5*****
0.027	7.2	7.5	3.5	5.0	0.5	W242E273-D5*****
0.033	7.2	7.5	3.5	5.0	0.5	W242E333-D5*****
0.039	7.2	7.5	3.5	5.0	0.5	W242E393-D5*****
0.047	7.2	9.5	4.5	5.0	0.6	W242E473-D6*****
0.056	7.2	9.5	4.5	5.0	0.6	W242E563-D6*****
0.068	7.2	9.5	4.5	5.0	0.6	W242E683-D6*****
0.082	7.2	10.0	5.0	5.0	0.6	W242E823-D6*****
0.10	7.2	10.0	5.0	5.0	0.6	W242E104-D6*****
0.12	7.2	11.0	6.0	5.0	0.6	W242E124-D6*****
0.15	7.2	11.0	6.0	5.0	0.6	W242E154-D6*****

备注: 1. “-”表示容量偏差。“-”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack

■ 外形尺寸 Dimensions (mm) Pattern I

400Vdc (200Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W242G102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W242G122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W242G152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W242G182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W242G222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W242G272-D5*****
0.0033	7.2	6.5	2.5	5.0	0.5	W242G332-D5*****
0.0039	7.2	6.5	2.5	5.0	0.5	W242G392-D5*****
0.0047	7.2	6.5	2.5	5.0	0.5	W242G472-D5*****
0.0056	7.2	7.5	3.5	5.0	0.5	W242G562-D5*****
0.0068	7.2	7.5	3.5	5.0	0.5	W242G682-D5*****
0.0082	7.2	7.5	3.5	5.0	0.5	W242G822-D5*****
0.010	7.2	7.5	3.5	5.0	0.5	W242G103-D5*****
0.012	7.2	9.5	4.5	5.0	0.6	W242G123-D6*****
0.015	7.2	9.5	4.5	5.0	0.6	W242G153-D6*****
0.018	7.2	9.5	4.5	5.0	0.6	W242G183-D6*****
0.022	7.2	10.0	5.0	5.0	0.6	W242G223-D6*****
0.027	7.2	11.0	6.0	5.0	0.6	W242G273-D6*****
0.033	7.2	11.0	6.0	5.0	0.6	W242G333-D6*****
0.039	7.2	11.0	6.0	5.0	0.6	W242G393-D6*****
0.047	7.2	11.0	6.0	5.0	0.6	W242G473-D6*****

500Vdc (220Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W242H102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W242H122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W242H152-D5*****
0.0018	7.2	6.5	2.5	5.0	0.5	W242H182-D5*****
0.0022	7.2	6.5	2.5	5.0	0.5	W242H222-D5*****
0.0027	7.2	6.5	2.5	5.0	0.5	W242H272-D5*****
0.0033	7.2	7.5	3.5	5.0	0.5	W242H332-D5*****
0.0039	7.2	7.5	3.5	5.0	0.5	W242H392-D5*****
0.0047	7.2	7.5	3.5	5.0	0.5	W242H472-D5*****
0.0056	7.2	7.5	3.5	5.0	0.5	W242H562-D5*****
0.0068	7.2	9.5	4.5	5.0	0.6	W242H682-D6*****
0.0082	7.2	9.5	4.5	5.0	0.6	W242H822-D6*****
0.010	7.2	9.5	4.5	5.0	0.6	W242H103-D6*****
0.012	7.2	9.5	4.5	5.0	0.6	W242H123-D6*****
0.015	7.2	10.0	5.0	5.0	0.6	W242H153-D6*****
0.018	7.2	11.0	6.0	5.0	0.6	W242H183-D6*****
0.022	7.2	11.0	6.0	5.0	0.6	W242H223-D6*****
0.027	7.2	11.0	6.0	5.0	0.6	W242H273-D6*****

630Vdc (220Vac)						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	7.2	6.5	2.5	5.0	0.5	W242J102-D5*****
0.0012	7.2	6.5	2.5	5.0	0.5	W242J122-D5*****
0.0015	7.2	6.5	2.5	5.0	0.5	W242J152-D5*****
0.0018	7.2	7.5	3.5	5.0	0.5	W242J182-D5*****
0.0022	7.2	7.5	3.5	5.0	0.5	W242J222-D5*****
0.0027	7.2	7.5	3.5	5.0	0.5	W242J272-D5*****
0.0033	7.2	7.5	3.5	5.0	0.5	W242J332-D5*****
0.0039	7.2	7.5	3.5	5.0	0.5	W242J392-D5*****
0.0047	7.2	9.5	4.5	5.0	0.6	W242J472-D6*****
0.0056	7.2	9.5	4.5	5.0	0.6	W242J562-D6*****
0.0068	7.2	9.5	4.5	5.0	0.6	W242J682-D6*****
0.0082	7.2	9.5	4.5	5.0	0.6	W242J822-D6*****
0.010	7.2	10.0	5.0	5.0	0.6	W242J103-D6*****
0.012	7.2	11.0	6.0	5.0	0.6	W242J123-D6*****
0.015	7.2	11.0	6.0	5.0	0.6	W242J153-D6*****
0.018	7.2	11.0	6.0	5.0	0.6	W242J183-D6*****

备注: 1. "-" 表示容量偏差。"- " = capacitance tolerance code, M=±20%,K=±10%,J=±5%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack